SHAKER AMPLIFIER

DYN-SA-150

DynaLabs

The SA-150 amplifier is compatible with both Inertial shakers and the PM-10 shaker.

All inertial shakers use the same amplifier box, which can also generate sinusoidal signals and support third-party shakers.
This compact, all-in-one unit can be customized to output different signals, such as white noise, pink noise, or other waveforms.

Adjustable gain	Yes
External Signal Input	Yes
External Input Voltage	1 VAC (Peak)
Amplifier Weight	0.65 kg
Dimensions W x H x D (mm)	102 x 46 x 102 mm
Power Supply Voltage	24 V DC
Power Supply Current	5 A
AC Output	24 V
Current Limiting (Load current)	Max: 15 A

Technical Drawings:



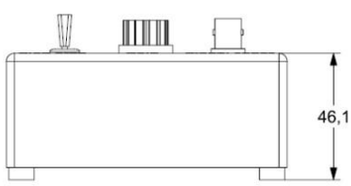

DYNALABS MUHENDISLIK LTD STI
Ostim OSB Mah. 100 Yıl Bulvarı Ostim No:55B/11 Yenimahalle 06374 Ankara TURKEY

Phone: **+90 312 386 21 89**

Mail: **dynalabs@dynalabs.com.tr**
Web: **www.dynalabs.com.tr**